SL-NT24CV150W-DB1
Power supply 150 Watt

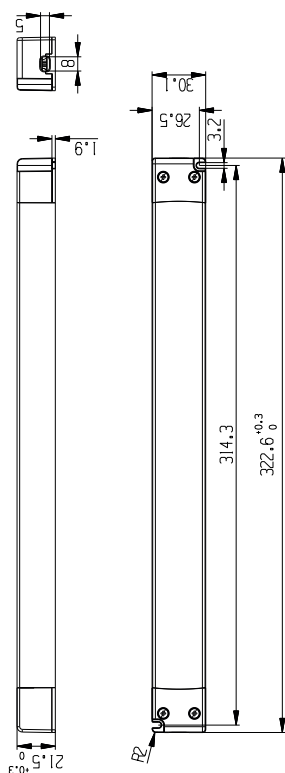### PRODUCT FEATURES

„150 Watt power supply incl. 2 m connection cable

„ low stand-by consumption < 0,5 W

„Short circuit protection

„Over load protection

„ 6 compartment distribution box for connection of 24V DC SIRO
   Receiver and 24V DC MONO Led products without control

TECHNICAL DATA

» Light type:.. LED
» Input voltage:... 220 - 240 VAC
» Output voltage: .... 24V DC
» Output current: .... 6,25 A
» Power: .... 150 Watt
   (10% reserve recommended)
» Efficiency: .... > 90 %
» Standby P: .... 0,22 W
» No-load power P_no: .... 0,27 W
» Networked standby power P_net:.................. 0,27 W
» Protection class:.. IP20
» Power frequency input: .... 50Hz bis 60Hz
» Housing color: .... weiß
» Ambient temperature:.................................... -20° - +45° C
» Safety: .... Short circuit protection,
   overload protection

DIMENSIONS & WEIGHT

» Lenght:.. 322,6 mm
» Width:.. 30,0 mm
» Height.. 21,5 mm
» Weight in G:.. 280,0 g

RoHS ♻ CE

Must not be disposed of in household waste.

SIRO Beschläge- und
Metallwarenfabrik
Spielfeldstraße 12
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932
E-Mail office@siro.at
Web . www.siro.at